TSB #	SUBJECT	DATE
GI202510-37	RITE-SYNC® Process	10/15/2025

Overview:

RITE-SYNC® is an exclusive Bartec USA® tool function that allows the technician to install a new RITE-SENSOR® into a wheel & tire assembly, just like an OE sensor. There is no need to pre-program the RITE-SENSOR® before installing it into the wheel & tire. RITE-SYNC® is make-model-year specific, thus keeping the relearn process consistent with the OE relearn process.

Using Rite Sensor:

- Verify the MMY that is being worked on has RITE-SENSOR® coverage.
- Install the RITE-Sensor® into the wheel & tire.
- Mount the wheel & tire to the vehicle.
- Use RITE-SYNC® to perform the relearn based on the make, model, and year.

Tool Process: (RITE-SYNC®) Tech600PRO:

- Choose the make, model, and year by **VINdicate™** or manually through MMY.
- Select **Relearn**.
- Select **Relearn: OBD RITE-SYNC®** or **Relearn: Stationary RITE-SYNC®.**
- Follow the relearn process by activating the sensors in the LF/RF/RR/LR wheel locations.

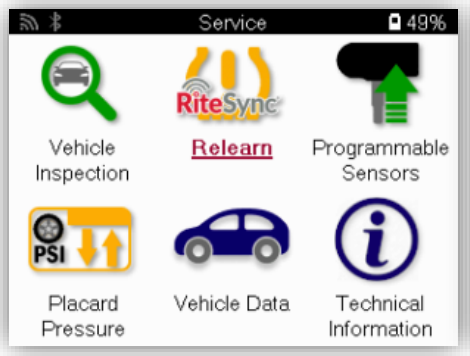

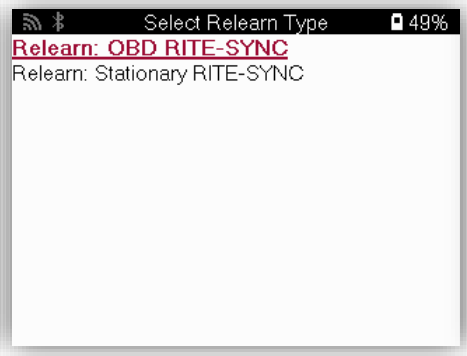

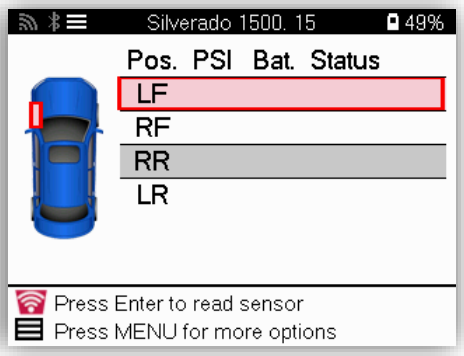

Note:

Stnry RITE-SYNC®: Stationary relearn process with RITE-Sensor® support.
OBD RITE-SYNC®: OBD relearn process with RITE-Sensor ® support.
Drive RITE-SYNC®: Drive (Auto) relearn process with RITE-Sensor® support (activate sensors before drive).

Relearns listed with RITE-SYNC® still support other sensors: both OE and aftermarket. Other programable sensors used will need to be pre-programmed before the relearn process. Not all sensors support programming in the wheel and tire and/or under pressure.

©2025, Bartec USA, LLC
Bartec USA Technical Support: [866]407-8767
Bartec makes commercially reasonable efforts to provide accurate and complete data in connection with our tools and our website, but the volume of data compiled and the variety of sources from which the data comes makes it impossible to warrant full accuracy or completeness of any kind. AS A RESULT, BARTEC DOES NOT WARRANT, AND SPECIFICALLY DISCLAIMS ANY WARRANTY, THAT OUR TOOLS, WEBSITE, AND/OR THE CONTENT CONTAINED THEREIN IS ACCURATE OR COMPLETE.