



TPMS Technical Service Bulletin



General Information

GI-11042-014

Applies To: Programming QWIK Sensor with Bartec Tools

Dec 8, 2014

Minimum Software Requirement: R52.0

Brands Covered:

- QWIK Sensor
- NAPA Echlin QWIK Sensor



Tools Supporting:



Programming Sensors:

For optimum performance, we recommend the sensor is programmed prior to installation and for best results position your sensor and tool as shown here. Insure NO OTHER sensors are within the area (6 feet +) to insure no cross talk or other interferences during programming.

With the sensor positioned at the top of the tool and the stem touching, you can proceed to follow the on tool prompts to complete the sensor programming.

NOTE: For best results program in free space. If you are programming in the wheel/tire, remove all pressure



Bartec USA Technical Support: 866-407-8767



TPMS

Technical Service Bulletin



General Information



GI-11042-014

While programming in the wheel/tire is possible, it is recommended to program in free space. If you are attempting to program in the Wheel/Tire, remove all air pressure.

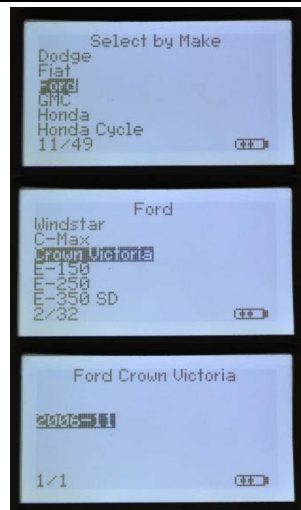
Alternate Process: if you are struggling to get it to program in the Wheel/Tire, you can try breaking the bead and moving the tire out of the way to allow the tool to get closer to the sensor as shown here.



Menu Flow for Programming (T500 and 400SD)



PROGRAM SENSORS: Home Screen
Note: can also be accessed in RELEARN toolkit



MAKE-MODE-YEAR

Bartec USA Technical Support: 866-407-8767



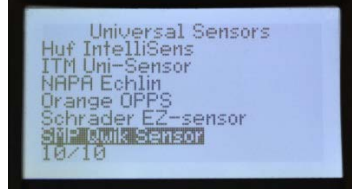
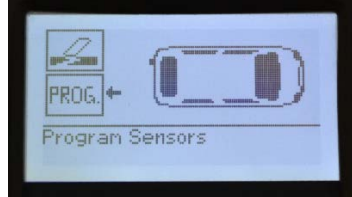

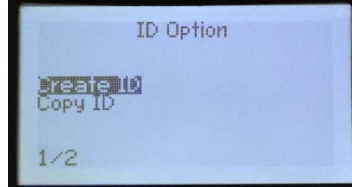

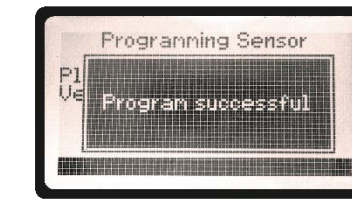
TPMS

Technical Service Bulletin



General Information

GI-11042-014

	SMP QWIK SENSOR *Note: this selection is used for QWIK Sensor and NAPA Echlin QWIK sensor
	Operations Screen: if doing COPY read sensors 1st
	Select wheel position
	Create ID: no need to read sensors Copy ID: MUST READ SENSORS 1 st ! Go back to operations screen
	TELLS YOU WHAT COLOR TO USE
	Will tell you programmed successfully

Bartec USA Technical Support: 866-407-8767






TPMS Technical Service Bulletin



General Information

GI-11042-014

Menu Flow for Programming (T400Plus)	
	Unlike the 400SD/500, the only place you can access sensor programming on the 400Plus is in the operation screen. Scroll to the PROG sensor menu
	SMP QWIK SENSOR *Note: this selection is used for QWIK Sensor and NAPA Echlin QWIK sensor
	Select the process you are wanting to complete and follow the on screen prompts.

Bartec USA Technical Support: 866-407-8767

©2014, Bartec USA, LLC - Printed in the U.S.A. - All Rights Reserved